



ELOTEX® FX6300

REDISPERSIBLE POLYMER POWDER TECHNOLOGY
FOR HIGH CLASS TILING

EXPERIENCE THE DIFFERENCE


ELOTEX® FX6300 brings the performance of cement based tile adhesives to a new level. ELOTEX® FX6300 is new environmentally friendly redispersible polymer powder specifically developed for high performance tile adhesives such as C2S1 and C2TE(S1) mortars (according to EN12004). Use of our new ELOTEX® FX6300 is highly recommended and especially suitable when an extended open time and improved wet adhesion properties are required.

BENEFITS

Use of ELOTEX® FX6300 will ensure:

- Excellent mortar rheology and workability
- Increased mortar stability
- Delayed skin formation of tile adhesive mortars
- Improved cohesion strength properties of the hardened adhesive mortar
- Excellent adhesive bond strength even under wet conditions


- Extended open time of the tile adhesive
- Conformity to *EMICODE® EC1^{PLUS} VOC emission requirements
- Conformity to BfR XIV requirements for contact with potable water (BfR Recommendations on Food Contact Materials – XIV. Polymer Dispersions)

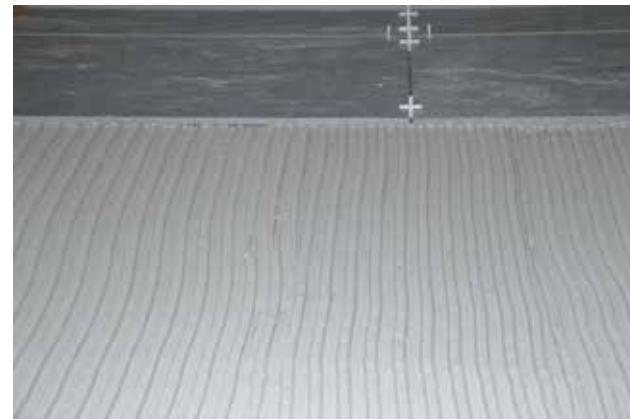


* Only full members of the GEV may label their products with EMICODE® seal after fulfilling certain conditions and testing. EMICODE® EC2, EC1 and EC1^{PLUS} are registered trademarks of GEV. Note that the VOC emissions of the final dry mortar are impacted by formulation ingredients other than only redispersible polymer powder.



With the unmatched performance in open time and due to delayed skin formation, use of ELOTEX® FX6300 in tile adhesive mortar offers application flexibility and efficiency, shortening tile application cycles and saving on labor costs. Comparison of ELOTEX® FX6300 to comparative tile adhesive redispersible polymer powders at 4.00% dosage in the tile adhesive formulation.

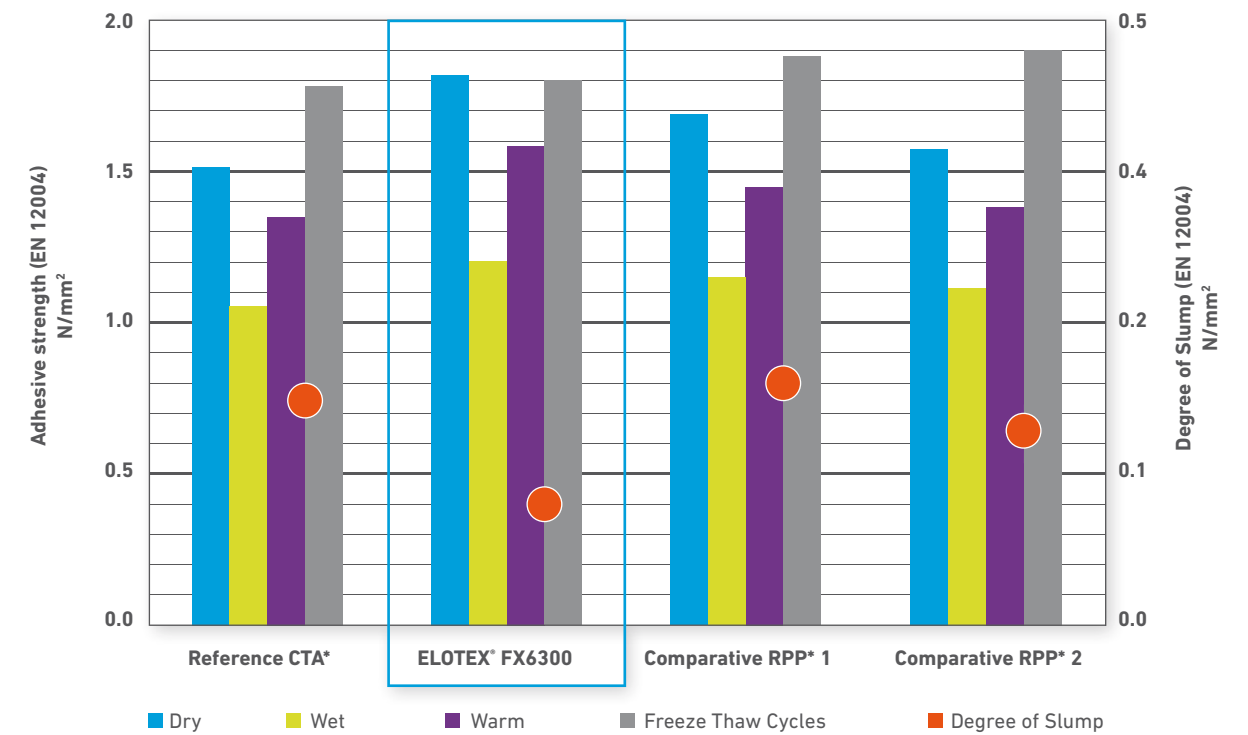

Unmatched open time performance of ELOTEX® FX6300 at 4.00% dosage in the tile adhesive formulation.

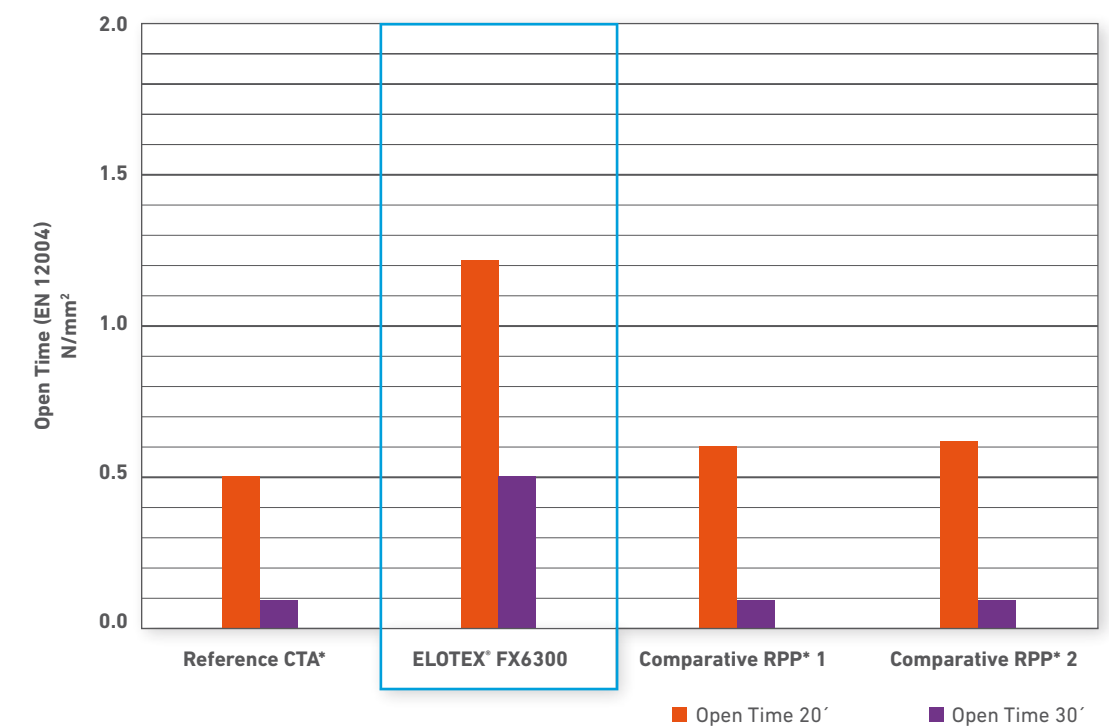

*CTA = Ceramic tile adhesive, RPP = Redispersible Polymer Powder



Redispersible Polymer Powder
contact.elotex@celanese.com

Celanese Switzerland AG

Industriestrasse 17a
CH-6203 Sempach Station
T +41 41 469 69 69
contact.elotex@celanese.com
www.elotex.com
www.celanese.com